



FIRE ALARM SYSTEM

Fire Alarm P.B.L Combination Series

Base Manual Call Point (HS-Base)



HS-FP1 Manual Call Point

DESCRIPTION

This Fire Manual Station can quickly transmit a signal to the fire receiver terminals or the repeaters while the button under a transparent protective cover has been pushed at the first finding of a fire accident. (This signal is beyond the accumulated time limitation).

There is a light over the button. The light will light up as a signal has been exactly received by the receiver terminal. There is also a telephone jack for telephone communication with attendant at the fire receiver terminal.




SPEifications

Model No.	HS-FP1
Voltage Range	24V DC
Alarm Current	30 mA
Contact Rating	24V DC 100mA
Sub-Function	Phone jack; Confirmation LED; Reset button
Option	Base
Material	Fire-Proof plastics
Dimensions	Φ 140 (mm)
Weight	150g
Color	Red

ADVANTAGES

1. Auto-Return by pushing button, no need to disassemble the main body.
2. Response light available to identify the operation completed.
3. Reinforced transparent protective cover is reusable.
4. All plastics are fire-proof, light, convenient and stylish.
5. Outside cord distribution with terminators to ease on work.

MOUNTING

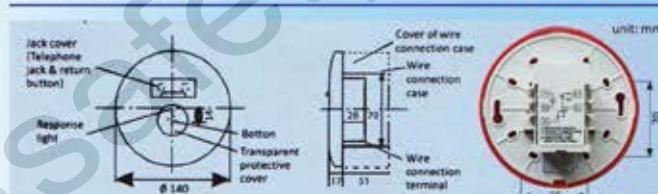

HS-FL3 Indicator Lamp LED



DESCRIPTION

The fire indicating lamp is an equipment to go twinkling, to show the position of a fire signal device and to be controlled vby fire receiver terminal or a repeater while a fire accident occured.

SPEifications

Model No.	HS-FL3
Power Source	24V DC
Alarm Current	12 mA
Ambient Temp.	-10°C~+55°C
Material	Fire-Proof plastics
Weight	52g
Dimensions	Φ 92 x 58 (H) mm
Color	Red



HS-FB6 Alarm Bell FB6 24V

DESCRIPTION

The fire alarm bell is an equipment controlled by the fire receiver terminal or the repeater and sounds a warning as a fire accident occurred.

ADVANTAGES

1. The way of motor-driven is taken at the low consumption of current, to reduce the load for power output from receiver terminal.
2. This design of exceptional structure is sturdy and durable. The bell even can ring to last 40 hours without decline of the performance and structure.

SPEifications

Model No.	HS-FB6
Power Source	24V DC
Alarm Current	35 mA
Movement	Motor
Material	3.0 Alloy Alu
Dimensions	Φ 6" (150mm)
Weight	418g
Sound Output	90 dB/ M and above
Color	Red

