


# Smoke + Heat Combo Detector

FIRE  
ALARM  
SYSTEMS

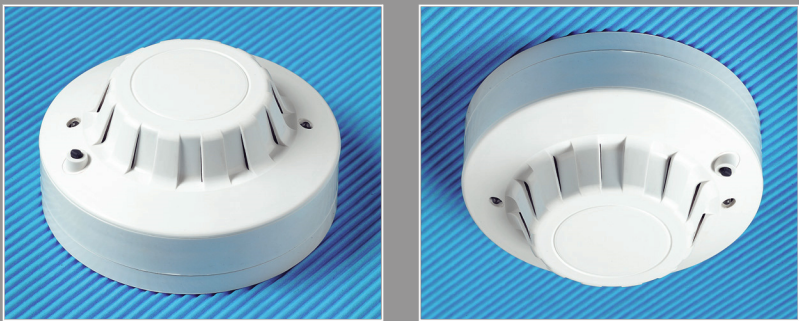

MODEL: HC-207D


### Features

- 1. Ionization smoke detector with heat detection (60°C will alarm).
- 2. With dual LED, easy to observe state of detector.
- 3. The dual LED flash once every 4 ~ 6 seconds in peacetime to show if the detector work normally.  
The dual LED light up constantly when the detector alarms.
- 4. With (-R) contact to connect to a remote indicating lamp to show alarm signal in different area.

### Specifications

|                     |                         |                                                                                                                                                     |                             |
|---------------------|-------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|
| Model No            | HC -207D                | Overall structure                                                                                                                                   |                             |
| Rated voltage       | 24VDC System from Panel | Material                                                                                                                                            | Fire-resisting ABS material |
| Standby current     | 35 $\mu$ A              | Joint contact                                                                                                                                       | Copper (zinc-plated)        |
| Alarm current       | 60mA                    | Color                                                                                                                                               | Ivory                       |
| Working temperature | -15~50 °C               | Notes<br>Prohibit from being installed at the places with large volume of smoke and steam lingering, and the inlet and outlet of cold and warm air. |                             |
| Working humidity    | 0~95% RH                |                                                                                                                                                     |                             |
| Size                | 103mm x 43mm            |                                                                                                                                                     |                             |
| Weight              | 150g                    |                                                                                                                                                     |                             |

### General wiring drawing

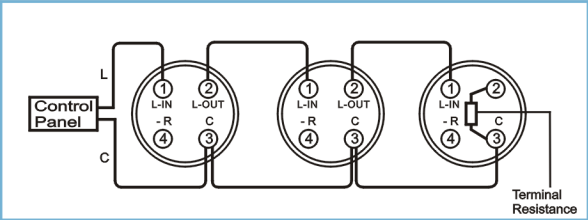

### Wiring with Remote Indicating Lamp

